


PERFOLISSE COIL

GENERAL INFORMATION – STANDARD PRODUCTS

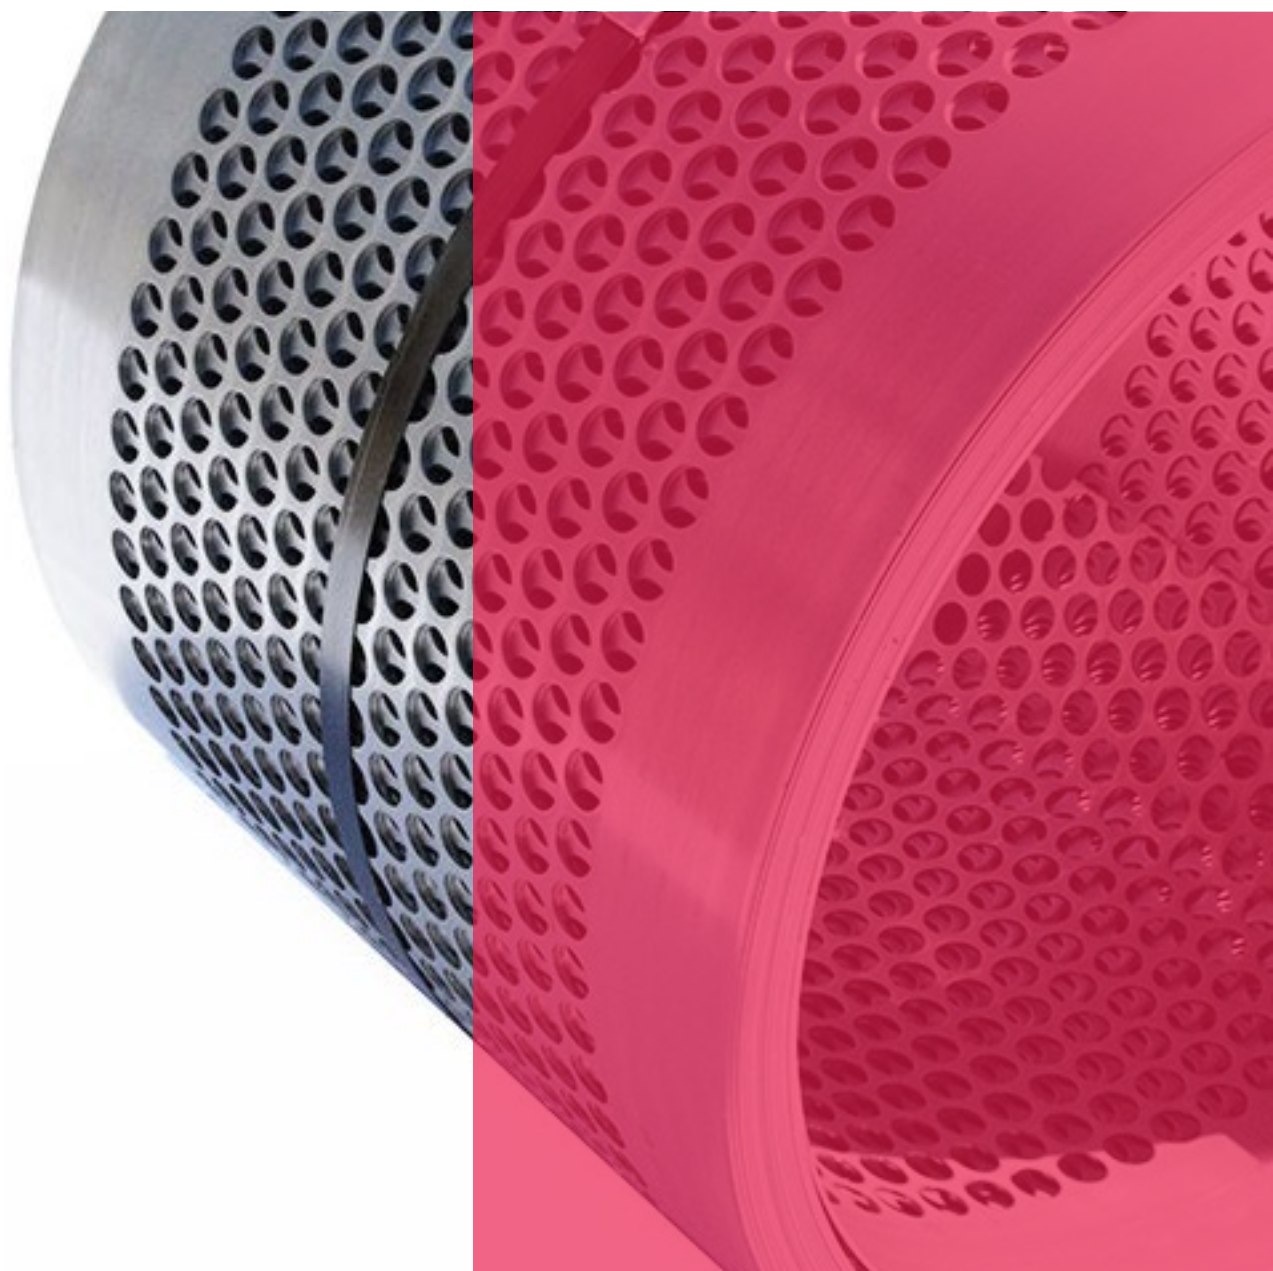

March 2016


BALUSTRADE INFILL

The most efficient and economical perforated balustrade infill : minimal waste when cutting to size, quick and simple to use.

Perfolisse coil can be cut according to the length required for your balustrade or barrier rails.

Plain margins on the long edges ensure a precise finish.

Application example

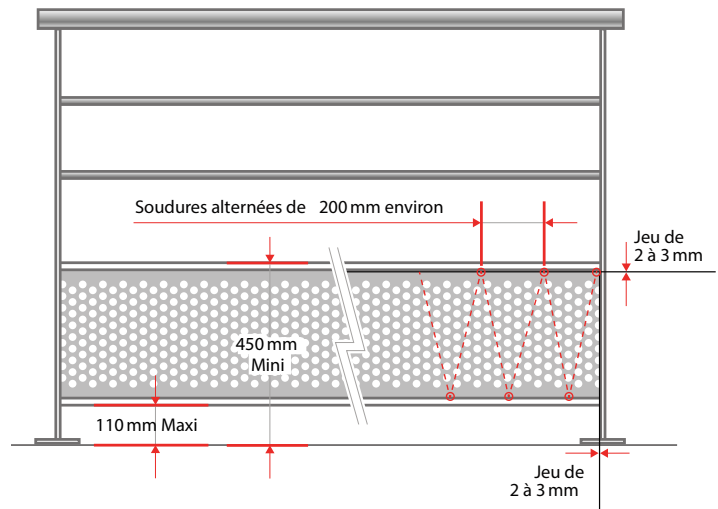

SIZES AND MATERIALS

□ Size

The available standard sizes are (in mm) :

- 25000 x 350
- 25000 x 450


□ Thickness

The Perfolisse coil have a thickness of 2mm

□ Surface finish tolerance

These products are not guaranteed to be without scratches and marks

□ Material

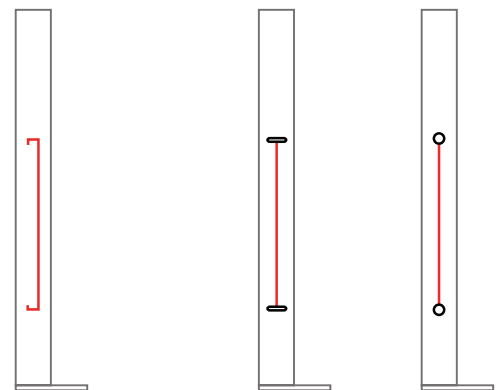

Width 450
With strengthening edge folds

Width 350
With profile edging assembled.



STEEL

S235JR Steel
DD11 Steel

Galvanised steel
DX 51D + Z140 or Z275

Standard
NF EN 10025-2

Standard
NF EN 10327

Recommendations

To avoid risk of corrosion, we recommend applying an anti-corrosion surface treatment for relevant to your application. The material is suitable for hot-dip galvanising.

Recommendations

To avoid risk of corrosion, we recommend applying an anti-corrosion surface treatment for relevant to your application.